

TRUST MODEL FOR SOCIAL NETWORK

Arnostka Netrvalova and Jiri Safarik
Department of Computer Science and Engineering
University of West Bohemia
Univerzitni 8, Plzen
Czech Republic
E-mail: netrvalo@kiv.zcu.cz

KEYWORDS

Trust, trust modeling, personal trust, social network.

ABSTRACT

The paper deals with the personal trust modeling in social networks. Terms trust, personal trust, trust affecting factors, and trust representation are introduced. The proposed trust model integrates more factors which affect trust determination in social network. The model covers basic factors as reciprocal trust, subject reputation, subject trust recommendations, and is extended by trusting disposition. The role of these factors participating in trust forming is discussed. Modifications of parameter values describing mentioned factors and their effects on personal trust evolution are investigated. Examples of behavior of trust model for social networks are examined by parameter studies. The studies demonstrated that the model enables to study the dynamics of trust evolution in social networks.

INTRODUCTION

The meaning and characteristics of trust were described in many works focused on social issues (Fukuyama 1995; Seligman 1997; Sztompka 1999; Gambetta 2000). In next steps trust models were created (Chang et al. 2005; Lifan 2008). Further, trust plays an important role in e-service (Liu et al. 2008), e-commerce (Zhang et al. 2008), e-banking, peer-to-peer networks (Chen and Yeager 2008). Wide-spreading of communication through social networks, where humans have to collaborate, asked adding trust to these electronic systems (Mui 2002; Carrington et al. 2005; Dwyer et al. 2007; Richters et al. 2011).

Various approaches were designed for computational models of trust. Let us give just a few examples based on agent technology (Rettinger et al. 2007; Sankaranarayanan et al. 2010a), fuzzy systems (Chang et al. 2005; Sankaranarayanan et al. 2010b), Markov models (Hussain et al. 2005), or game theory (Sankaranarayanan 2007).

The aim of our work is building trust model and simulation of the trust evolution in social network. The model closely reflects members of social networks, especially introduces differentiating members in their disposition to trust somebody.

The organization of the paper is following. Firstly, the term trust and its representation are introduced. Next, we introduce the trust model and we use it for trust affection modeling in social network. Finally, behavior of the trust model is investigated and the results are presented.

TRUST AND TRUST REPRESENTATION

Trust is a fact of everyday life and plays an explicit role in societies. We all make trust decisions, most of us every day in our lives, and many times per day (Luhmann 1979). The decision to trust is based on evidence to believe, or be confident in, someone something's good intentions towards us (Yamamoto Y., A Morality Based on Trust, 1990).

Based on Gambetta (Gambetta 2000), we interpret trust as a confidence in the ability or intention of a person to be of benefit to trustworthy something or someone at sometime in future. Generally, trust can be quantified by a value from an interval $\langle a, b \rangle$, where a, b ($a < b$) are integer or real numbers. Verbal trust levels are possible to represent by values from this interval (see in Figure 1). Trust in our model is represented by a value from continuous interval $\langle 0, 1 \rangle$. Value 0 represents complete distrust and value 1 means blind trust.

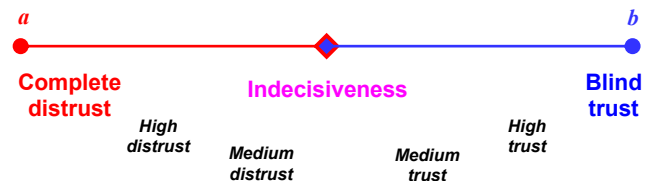


Figure 1: Trust Representation

PERSONAL TRUST REPRESENTATION

Further, we specify an interpersonal trust representation, i.e. trust between two subjects (Netrvalova and Safarik 2009). Consider a group of n subjects represented as the set $S = \{s_1, s_2, \dots, s_n\}$. The measure of personal trust between the subject s_i and s_j is introduced as follows

$$t_{ij} = t(s_i, s_j), t_{ij} \in \langle 0, 1 \rangle, \text{ where } i, j = 1, \dots, n, i \neq j,$$

$$\text{and } \sum_{j=1, j \neq i}^n t_{ij} = 1 \quad (1)$$

Further we suppose that both values t_{ij} and t_{ji} exist, thus providing reciprocal trust. The directed weighted graph is used for personal trust representation in the social network. Vertices represent the subjects, oriented edges represent trust relations between subjects and the weights are trust values. The direction of the edge reflects possible trust asymmetry,

i.e. $t_{ij} \neq t_{ji}$ (trust of i -th subject in j -th one may differ, and usually differs, from trust of j -th subject in i -th one).

Example of personal trust representation in a small group is shown in Figure 2. This group consists of three individuals A, B and C. The individual A trusts to B by value 0.9, trust value of individual B to A is 0.4, individual B trusts to C by 0.6, C to B trusts by value 0.8, trust value of individual C to A is 0.2, and trust A to C is 0.1. Note, that the graph does not contain self-looped edges.

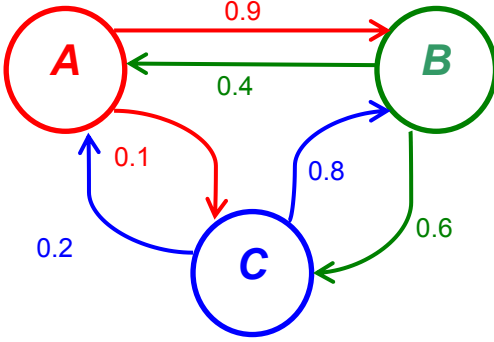


Figure 2: Trust in Group

Interpersonal trust is formed by many factors. Beside usually considered factors, which are reputation and recommendation, we introduce a subject's trusting disposition. The reputation of the subject comes after individual experience and by some information dissemination about subject in its neighbourhood and influences trust formation considerable. Information about another subject that other subjects have passed on is called recommendation. Trusting disposition represents a non rational behaviour of a subject and is modeled by random factor.

TRUST IN SOCIAL NETWORK

Social network can be described as a social structure created by the individuals that are bonded together on the basis of some particularity. This particularity can cover e.g. family relationship, friendship, financial transactions, common interest, and so on.

Applications of social networks are used in biology for disease spread simulation, in economy and marketing to secure higher profit, e.g. advertisements aimed at population groups. Internet and information technologies have the most significant role in social network applications. Social network is not only global network Facebook or Twitter, but also auction portal e-Bay, and its Czech modification Aukro, or specialized servers, e.g. Czech server Heureka focused on discussions about experience and practice in e-commerce.

Social network connects individuals in the groups. Individuals in social network are called actors. Relationships among actors form attitude of one actor to another one. The simplest attitude is binary one – believe or do not believe; in reality the attitude comprises more values. Primary factor in the process of forming attitude is trust.

Generally, social networks are modelled by the oriented weighted graphs similarly to the personal trust model.

Beside the trivial case of two actors, the basic form of social network formed from three actors, called triad, is in Figure 3. Shaded line represents orientation of both trust, and reputation. This convention will be used in Figures in the rest of the paper as well.

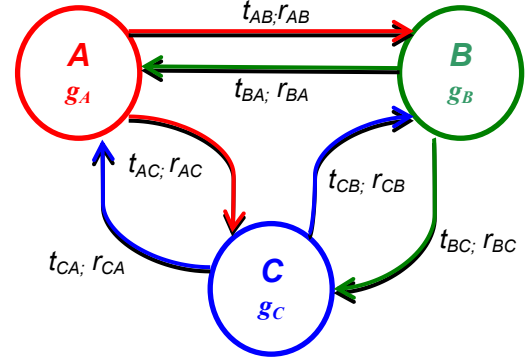


Figure 3: Trust Relations in Triad

In our model, the relationships among the actors s_i ($i = A, B, C$) in triad are represented by reciprocal trust t_{ij} and t_{ji} ($i, j = A, B, C, i \neq j$), reputation r_{ij} and r_{ji} , and trusting disposition g_{s_i} . Sending the recommendation to actor modifies its trust is described in detail in next section. A simple example of recommendation d_{CB}^A which is sent from actor C to actor B about its trust to actor A is shown in Figure 4.

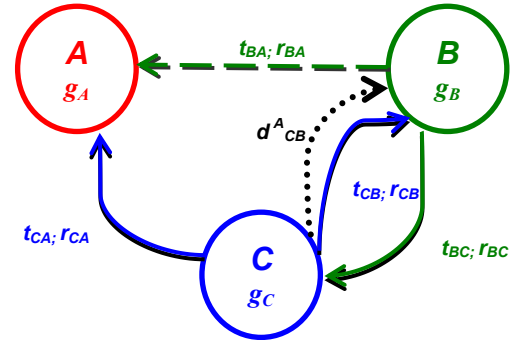


Figure 4: Trust Relations with Recommendation

Based on the recommendation (dotted line in Figure 4) trust t_{BA} and reputation r_{BA} (dashed line in Figure 4) will be modified.

SOCIAL NETWORK TRUST MODEL DESCRIPTION

Trust formation T_{ij} between two actors (trustor and trustee) is generally expressed as function

$$T_{ij} = f(t_{ij}, t_{ji}, d_{ij}^k, r_j, g_i), \quad (2)$$

where t_{ij}, t_{ji} is reciprocal trust of actors, d_{ij}^k are the recommendations of i -th actor to j -th actor about trust to k -th actor, r_j is reputation of j -th actor, and g_i is trusting disposition of i -th actor.

Reputation of an actor is computed from its neighbours, which provide their rating of the actor. The rating scale has six degrees - very negative experience VNE, negative

experience NE, neutral - negative NN, neutral positive NP, positive experience PE and very positive experience VPE. For each degree, a real value is assigned (see in Table 1). The reputation of an actor is arithmetic mean of the actor's neighbours rating values.

Table 1: Rating, Degree and Value Description of Reputation

Rating	Degree	Value
VNE	0	0
NE	1	0.2
NN	2	0.4
NP	3	0.6
PE	4	0.8
VPE	5	1

Actual trust value T_{ij} is produced by two components - previous trust t_{ij} and change of trust (gain or loss)

$$T_{ij} = t_{ij} + \Delta t_{ij}. \quad (3)$$

Thus, for trust variation of i -th actor (trustor) to j -th actor (trustee) the formula (4) is proposed

$$\Delta T_{ij} = \sqrt{t_{ij} t_{ji}} d_i^j w_d r_j w_r g_i w_g \quad (4)$$

where

t_{ij} is previous trust of i -th actor in j -th one, t_{ji} is previous trust of j -th actor in i -th one, and tendency of reciprocal trust influence is reflected by geometric mean;

d_i^j is average of recommendations about j -th actor to i -th computed by formula

$$d_i^j = \frac{\sum_{k=1}^p t_{ik} t_{kj}}{p}, \quad (5)$$

where t_{ik} , t_{kj} exists, and p is number of those actors; r_j is reputation of j -th subject described by formula

$$r_j = \frac{\sum_{l=1}^q r_{jl}}{q}, \quad (6)$$

where r_{jl} is actor's rating values given by q actors in its neighborhood;

g_i is trusting disposition expressed by the probability distribution function;

influence of recommendation, reputation, and trusting disposition is determined by the weight coefficients w_d ,

w_r , and w_g from the interval $\langle 0, 1 \rangle$.

Then, final trust T_{ij} formula is following

$$T_{ij} = t_{ij} + \sqrt{t_{ij} t_{ji}} \left(\frac{\sum_{k=1}^p t_{ik} t_{kj}}{p} \right) w_d \left(\frac{\sum_{l=1}^q r_{jl}}{q} \right) w_r g_i w_g \quad (7)$$

CASE STUDY

To illustrate trust evolution under parameter changes, we took an example of small social network on which the essential cases of trust changes are shown (Havel 2011).

Social network consists of fourteen actors with their trust relations. Actors and their known contacts in social network are given by the matrix of actors S . Matrix entries S_{ij} , $S_{ji} = 1$ when the actors i, j know each other, and $S_{ij} = 0$ otherwise.

$$S = \begin{pmatrix} 0 & 1 & 1 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 1 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 1 & 1 & 0 & 0 & 1 & 1 & 1 & 0 & 1 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 1 & 1 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

Trust matrix T describes reciprocal trust of actors. Existing trust is given by value in the interval $(0, 1)$. Value -1 represents the situation when the actors do not know each other or the fact that reciprocal trust is not known.

$$T = \begin{pmatrix} -1 & 0.2 & 0.99 & -1 & -1 & 0.99 & -1 & 0.99 & -1 & -1 & 0.6 & 0.8 & -1 & -1 \\ 0.2 & -1 & 0.8 & -1 & -1 & 0.6 & -1 & -1 & -1 & -1 & -1 & -1 & 0.3 & -1 \\ 0.99 & 0.99 & -1 & -1 & 0.4 & 0.9 & 0.7 & -1 & 0.6 & 0.3 & 0.3 & -1 & -1 & -1 \\ -1 & -1 & -1 & -1 & 0.01 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \\ -1 & -1 & 0.2 & 0.01 & -1 & -1 & -1 & -1 & -1 & 0.5 & -1 & -1 & -1 & -1 \\ 0.99 & 0.99 & 0.9 & -1 & -1 & -1 & 0.6 & 0.2 & -1 & -1 & -1 & -1 & 0.7 & -1 \\ -1 & -1 & 0.4 & -1 & -1 & 0.8 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & 0.8 \\ 0.8 & -1 & -1 & -1 & -1 & 0.3 & -1 & -1 & -1 & -1 & -1 & 0.3 & -1 & -1 \\ -1 & -1 & 0.7 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & 0.4 & 0.01 & -1 & -1 \\ -1 & -1 & 0.6 & -1 & 0.7 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \\ 0.5 & -1 & 0.3 & -1 & -1 & -1 & -1 & -1 & 0.8 & -1 & -1 & 0.2 & -1 & -1 \\ 0.4 & -1 & -1 & -1 & -1 & -1 & -1 & 0.1 & 0.01 & -1 & 0.7 & -1 & -1 & -1 \\ -1 & 0.8 & -1 & -1 & -1 & 0.8 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \\ -1 & -1 & -1 & -1 & -1 & -1 & 0.4 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \end{pmatrix}$$

Actor rating degrees are placed in the rating matrix R .

$$R = \begin{pmatrix} -1 & 5 & 5 & -1 & -1 & 5 & -1 & 5 & -1 & -1 & 5 & 5 & -1 & -1 \\ 5 & -1 & 5 & -1 & -1 & 5 & -1 & -1 & -1 & -1 & -1 & -1 & 5 & -1 \\ 4 & 3 & -1 & -1 & 5 & 3 & 1 & -1 & 5 & 2 & 4 & -1 & -1 & -1 \\ -1 & -1 & -1 & -1 & 0 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \\ -1 & -1 & 0 & 0 & -1 & -1 & -1 & -1 & -1 & 0 & -1 & -1 & -1 & -1 \\ 5 & 0 & 3 & -1 & -1 & -1 & 4 & 4 & -1 & -1 & -1 & -1 & 3 & -1 \\ -1 & -1 & 3 & -1 & -1 & 2 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & 4 \\ 4 & -1 & -1 & -1 & -1 & 1 & -1 & -1 & -1 & -1 & -1 & 5 & -1 & -1 \\ -1 & -1 & 3 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & 1 & 3 & -1 & -1 \\ -1 & -1 & 0 & -1 & 0 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \\ 5 & -1 & 5 & -1 & -1 & -1 & -1 & 5 & -1 & -1 & 5 & -1 & -1 & -1 \\ 4 & -1 & -1 & -1 & -1 & -1 & 3 & 5 & -1 & 0 & -1 & -1 & -1 & -1 \\ -1 & 3 & -1 & -1 & -1 & 5 & -1 & -1 & -1 & -1 & -1 & -1 & -1 & -1 \\ (-1 & -1 & -1 & -1 & -1 & -1 & 3 & -1 & -1 & -1 & -1 & -1 & -1 & -1) \end{pmatrix}$$

Trusting dispositions of actors are stored in trusting disposition vector G .

$$G = [0.99 \ 0.99 \ 0.8 \ 0.01 \ 0.01 \ 0.7 \ 0.4 \ 0.6 \ 0.3 \ 0.5 \ 0.8 \ 0.99 \ 0.01 \ 0.4]$$

The greater is value of trusting disposition parameter, the higher is tendency to trust anticipation.

The weights - recommendation weight w_d , reputation weight w_r and trusting disposition weight w_g were set to the value 0.6 in this case.

Reciprocal trust growth

Let us start with a pair of actors with rather low reciprocal trust. On the other hand they have high reputation and high trusting disposition. One of them has high recommendations,

while the other one's recommendation is average. Situation is shown in Figure 5. Four actors, i.e. 1, 2, 3 and 6, create the core of chosen part of social network. Pair of actors under study is 1, 2. We expect subsequent growth of both trust t_{12} , t_{21} , while the first should grow more rapidly. The results from our model depicted in Figure 6 are in good concordance with the expectation.

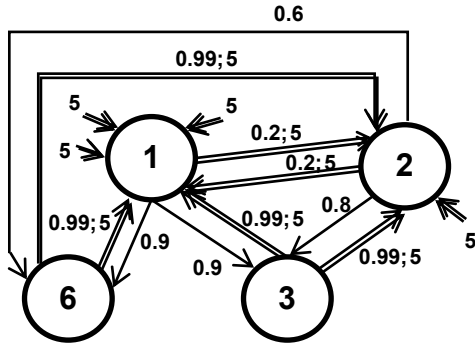


Figure 5: Trust Relations for Computation of Reciprocal Trust T_{12} , T_{21}

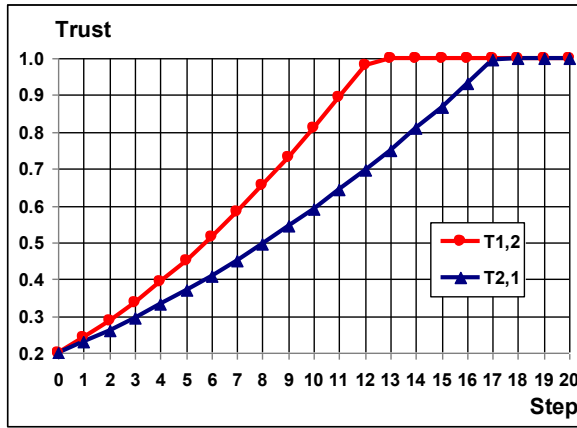


Figure 6: Study of Reciprocal Trust Growth T_{12} , T_{21}

Reputation influence

We explored how the trust under reputation growth will increase. The trust into an actor is computed for all six degrees of actor ratings by its neighbors. The study covers actors 1, 3, 9, and 11 (see Figure 7).

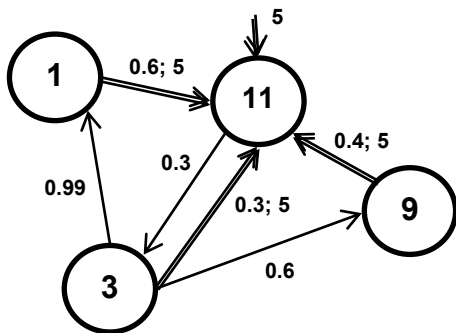


Figure 7: Reputation Influence – Needful Trust Relations

Reputation values of actor 11 gradually increase from 0 to 5 (rating matrix R , row 11). The other parameters do not change. Trust growth between actor 3 and actor 11 is depicted in Figure 8 and is in good in concordance with expected behavior.

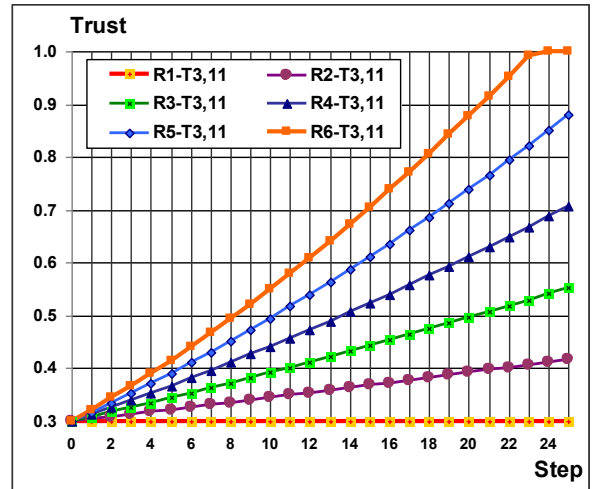


Figure 8: Study of Reputation Influence on Trust T_{311}

Recommendation influence

In this study the influence of recommendations on trust evolution is explored. Recommendation can be sent to direct neighbor actor only about direct neighbor of sender actor. To demonstrate the influence we selected the subgraph with actors 1, 6, and 8 (see Figure 9).

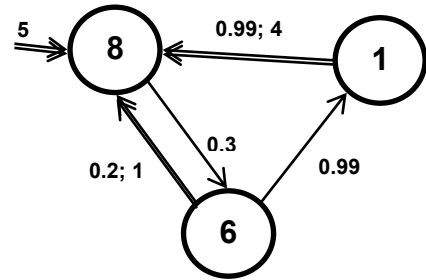


Figure 9: Recommendation Influence – Needful Trust Relations

Studied trust is between actor 6 and actor 8. The growth of this trust is brokered by common friend - actor 1 that will send the recommendation about actor 8 to actor 6. Influence of recommendation depends on trusts of actor 6 into actor 1, and actor 1 into actor 8. The value of element of trust matrix $T[6,1]$ is gradually changed to 0.1, 0.3, 0.5, 0.8, and 0.99, in association with element of trust matrix $T[1,8]$ which value is changed to 0.2, 0.3, 0.6, 0.8, and 0.99 pair wise. The results of this study are shown in Figure 10. According to expectation trust increases more rapidly with higher recommendations, cause by increase of trust between broker-actor and recommended actor as well between recommending actor and broker.

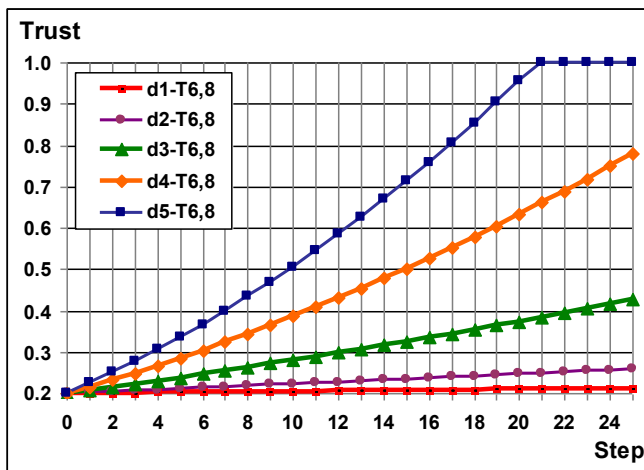


Figure 10: Study of Recommendation Influence on Trust T_{68}

CONCLUSION

We developed the personal trust representation, where trust values are from continuous interval compared e.g. to Markov models using trust levels. Based on this representation, trust model for social networks was developed and implemented. Model enables to study the dynamics of trust evolution in a social network under changing trust forming factors. Upcoming model modification will allow covering the effect of intentional trust affection of social network members.

REFERENCES

- Carrington P. J., Scott J., and Wasserman S., 2005. *Models and Methods in Social Network Analysis*. Cambridge University Press, New York, 2005.
- Fu B., 2007. "Trust Management in Online Social Networks." Ph.D. Thesis, University of Dublin.
- Fukuyama F. 1995. *Trust: The social virtues and the creation of prosperity*. New York, The Free Press.
- Chang E., Thomson P., Dillon T., Hussain F., 2005. *The Fuzzy and Dynamic Nature of Trust*. S. Katsikas, J. López, G. Pernul (Eds.): TrustBus 2005, LNCS 3592, pp. 161-174, Springer – Verlag Berlin Heidelberg.
- Chen R., Yeager W., 2008. *A Distributed Trust Model for Peer-to-Peer Networks*, Sun Microsystems. Available at: <http://gnunet.org/papers/jxtatrust.pdf>. [cit. 2011-06-25].
- Dwyer C., Hiltz S. R., and Passerini K., 2007. "Trust and privacy concern within social networking sites: A comparison of Facebook and MySpace." *Proceedings of the Thirteenth Americas Conference on Information Systems*, Keystone, Colorado.
- Gambetta D., 2000. *Can We Trust Trust?* In Gambetta, Diego (ed.) *Trust: Making and Breaking Cooperative Relations*, electronic edition. Department of Sociology, University of Oxford, chapter 13, 213-237.
- Havel L., 2011. "Social networks modelling and trust influence." Bachelor Thesis, University of West Bohemia, Czech Republic.
- Hussain, F.K., Chang, E., and Dillon, T.S., 2005. "Markov model for modeling and managing dynamic trust". In: *3rd IEEE International Conference on Industrial Informatics, INDIN'05*, IEEE Los Alamitos, pp. 725–733.
- Lifen L., 2008. "Trust Derivation and Recommendation Management in a Trust Model". In: *Proc. International Conference on Intelligent Information Hiding and Multimedia Signal Processing*, Harbin, China, pp. 219-222.
- Liu Y., Yau S., Peng D., and Yin Y., 2008. "A Flexible Trust Model for Distributed Service Infrastructures." In *Proceedings of the 2008 11th IEEE Symposium on Object Oriented Real-Time Distributed Computing*, Orlando, USA, 108-115.
- Luhmann N., 1979. *Trust and Power*. New York, John Wiley.
- Mui L., 2002. "Computational Model of Trust and Reputation: Agents, Evolutionary Games, and Social Networks". Ph.D. Thesis, Massachusetts Institute of Technology, USA.
- Netrvalova A., Safarik J., 2009. "Interpersonal Trust Model". In *proceedings of MathMod 2009, 6th Vienna International Conference on Mathematical Modelling*, Vienna, Austria.
- Rettinger A., Nickles M., and Tresp V., 2007. *Learning Initial Trust among Interacting Agents*. M. Klusch et al. (Eds.): CIA 2007, LNAI 4676, Springer – Verlag Berlin Heidelberg, pp. 313-327.
- Richters O., and Peixoto T. P., 2011. "Trust Transitivity in Social Networks." *PLoS ONE*, e18384, volume 6, Issue 4.
- Sankaranarayanan V., Chandrasekaran M., and Upadhyaya S., 2007. "Towards Modeling Trust Based Decisions: A Game Theoretic Approach". J. Biskup and J. Lopez (Eds.): *ESORICS 2007, LNCS 4734*, Springer – Verlag Berlin Heidelberg, pp. 485-500.
- Sathiyamoorthy E., Iyengar S., and Ramachandran V., 2010a. "Agent Based Trust Management Framework in Distributed E-Business Environment", *International Journal of Computer Sciences & Information Technology (IJCSIT)*, vol. 2, No. 1.
- Sathiyamoorthy E., Iyengar S., and Ramachandran V., 2010b. "Mobile Agent Based Trust Management Framework using Fuzzy Logic in B2C E-Business Environment". *International Journal of Computer Theory and Engineering*, Vol. 2, No. 2.
- Seligman S., 1997. *The problem of trust*. Princeton: Princeton University Press.
- Sztompka P., 1999. *Trust. A Sociological Theory*. Cambridge, Cambridge University Press.
- Zhang Z., Zhou M., and Wang P., 2008. "An Improved Trust in Agent-mediated e-commerce." *International Journal of Intelligent Systems Technologies and Applications*, vol. 4, 271-284.

AUTHOR BIOGRAPHY

ARNOSTKA NETRVALOVA was born in Plzen, Czech Republic. She is senior lecturer in Department of Computer Science and Engineering at Faculty of Applied Sciences of University of West Bohemia. She holds M.Sc. in Computer Science from University of West Bohemia in 1977. Her research interest in modeling and simulation in medicine covered models of temperature homeostasis. She received Ph.D. from the same university in 2010. Her present research is focused on trust modeling and simulation.

JIRI SAFARIK was born in Kromeriz, Czech Republic. He received his Ph.D. degree from Slovak University of Technology in 1984. Currently, he is professor in Department of Computer Science and Engineering at Faculty of Applied Sciences of University of West Bohemia. His research covers distributed systems, distributed and parallel simulation.